



BARCO SERIES


Super G

Paper & Corrugating Machines

Features & Benefits :

Seal wear indicator
Allowing for planned maintenance

Threaded & Quick release
mounting is an exact interchange to competitor's

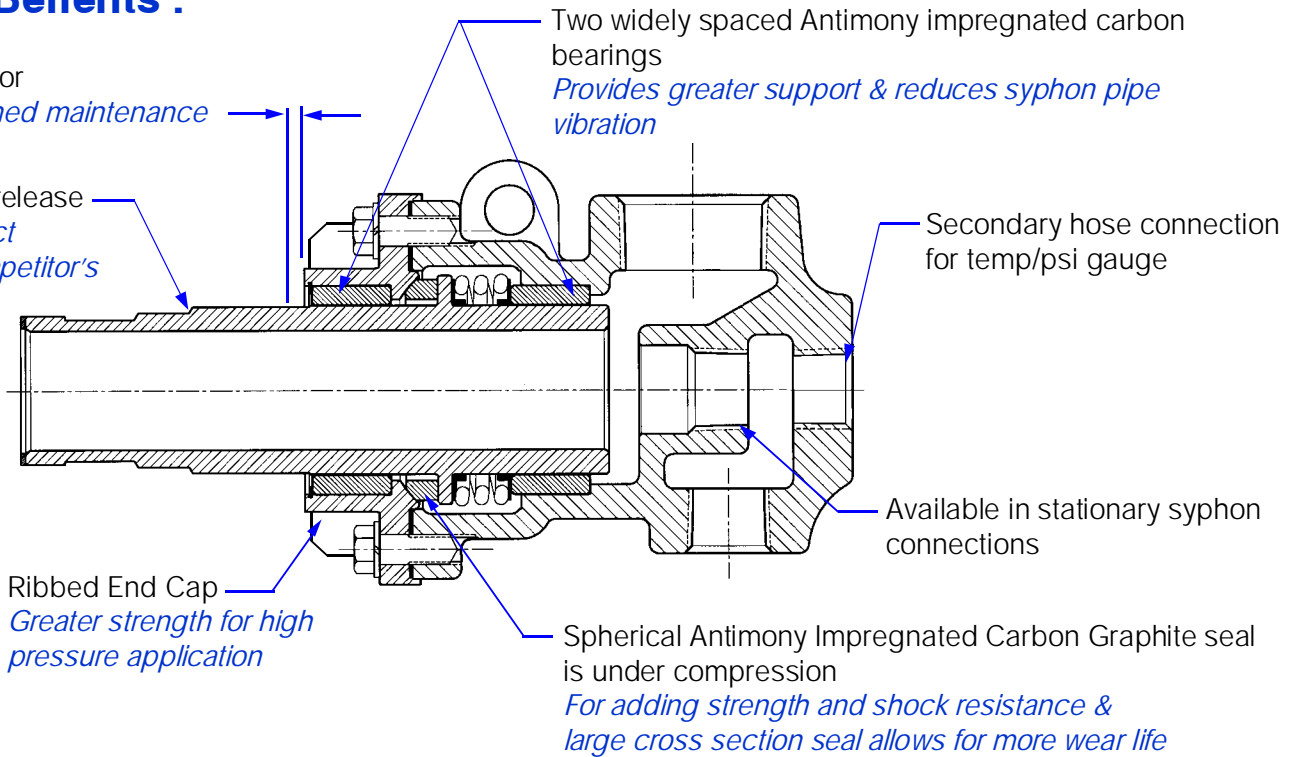

Sizes available : 1-1/4", 1-1/2" & 2"



Operating Parameters :

Pressure Rating -	
Steam	250 psi (17,5 Kg/cm ²)
Temperature	+406°F (207°C)

These rotary joints feature a ductile iron casing, ferrous sleeve and end cap, stainless steel springs and spring guides. The high density carbon seal under compression and widespread bearing surfaces assure exceptionally long life without lubrication.

Additional Benefits :

- Exceptionally long service life without lubrication.
- All wear surfaces are treated for improved corrosion resistance.
- Handles a wide range of operating conditions.
- Built-in seal wear indicator reduces expensive downtime.
- Antimony seals and bearings for extended life.
- Competitively priced.**
- Available from stock.**

Applications :

Specially designed for steam, including:

Paper Dryers, Corrugators & Flute Rolls.



Engineered for Exceptional Performance