



BARCO SERIES

Type "C"

Steam, Water & Hot Oil Applications

Features & Benefits :

Seal wear indicator

Allowing for planned maintenance


Threads or Flanged
to fit most applications

8 sizes available : 1/2" up to 3"

Mono-flow and Duo-flow models available

Ferrous trim for steam applications

Bronze trim for water applications

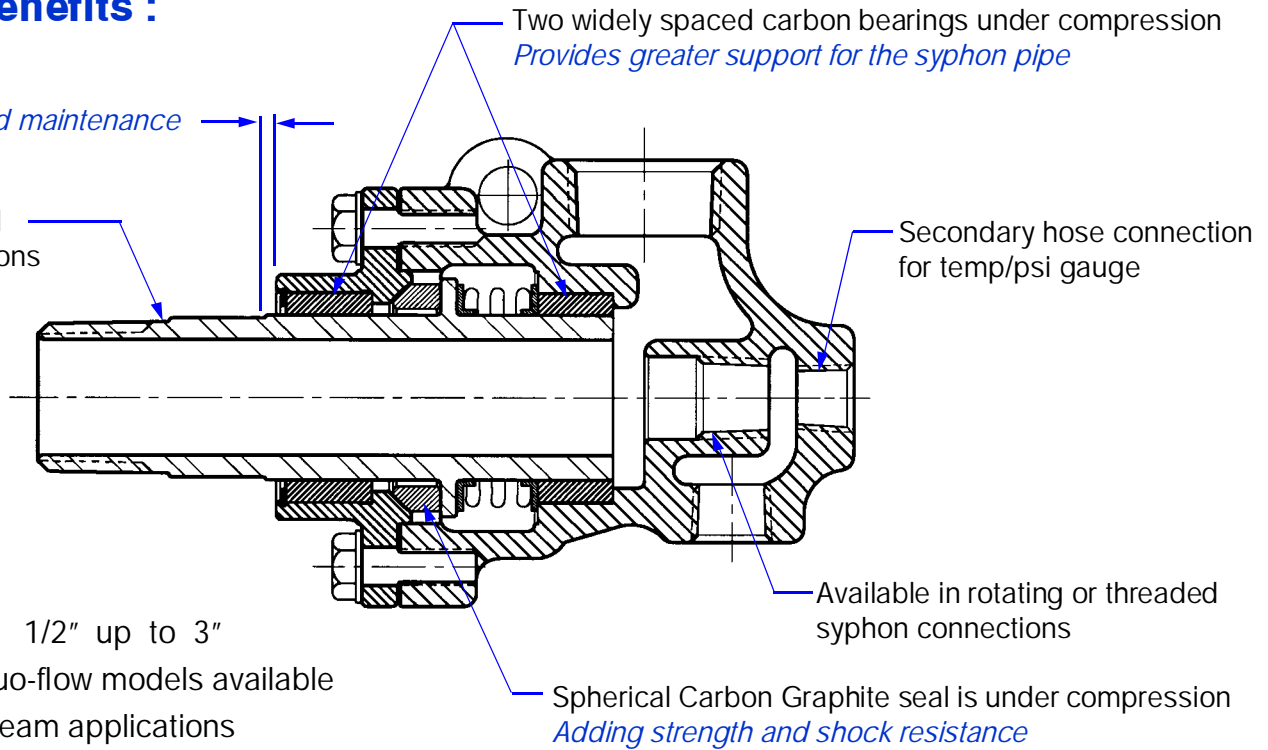

Additional Benefits :

- Exceptionally long service life without lubrication
- Handles a wide range of operating conditions
- Reduce expensive down time with wear indicator
- Competitively priced**
- Available from stock**

Applications :

Specially designed for steam, water & hot oil rolls including:

- Paper and textile drying cylinders
- Rubber Mills / Mixers / Calendars

These joints feature a ductile iron casing, bronze or ferrous sleeve and end cap, stainless steel springs and spring guides. The high density carbon seal under compression and wide-spread bearing surfaces assure exceptionally long life without lubrication.

Operating Parameters :

Pressure Rating -
Steam 250 psi (17,5 Kg/cm²)
Temperature +406°F (207°C)

Pressure Rating -
Hot Oil 150 psi (10,5 Kg/cm²)
Temperature +600°F (315°C)



Engineered for Exceptional Performance